


2011 Orthophoto Source: Boone County Assessor

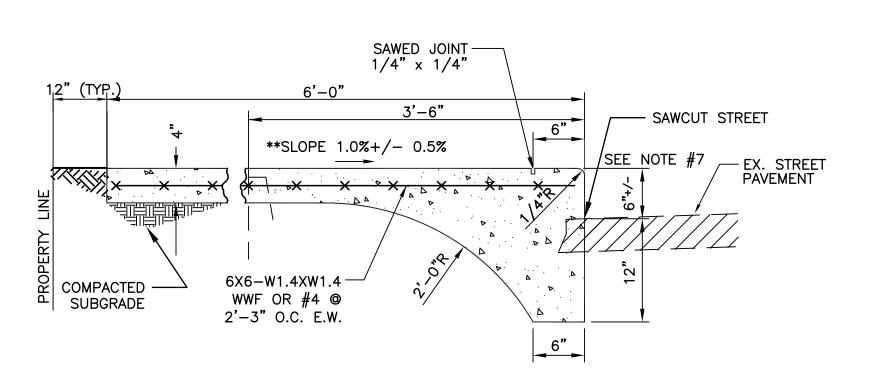

SIDEWALK WITH INTEGRAL CURB

NOT TO SCALE

- 1. SIDEWALK SHALL BE 4" THICK MODOT PAVEMENT CONCRETE.

- SIDEWALK SHALL BE 4 THICK MODOT PAVEMENT CONCRETE.
 INSTALL 1/2" EXPANSION JOINTS AT INTERSECTIONS, RAMPS, STRUCTURES, DRIVEWAY APPROACHES, OR EVERY 100'.
 INSTALL TRANSVERSE SAW JOINTS AT SPACING EQUAL TO SIDEWALK WIDTH.
 NO STEEL TO BE PLACED THROUGH EXPANSION JOINT.
 SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2.00%.
 WWR OR REBAR SHALL BE ACCURATELY PLACED AND FIRMLY HELD IN PLACE DURING CONCRETE PLACEMENT BY APPROVED METHODS, SEE SECTION 238.9.
 CURB FACE HEIGHT SHALL BE RETWEEN 4" AND 8" ALLOWING FOR
- 7. CURB FACE HEIGHT SHALL BE BETWEEN 4" AND 8" ALLOWING FOR FLUCTUATION IN THE STREET.
 8. CURB FACE TO BE BROOM FINISHED.

Shane Steven Creech Registered Professional Engineer PE—2007011061

T

ump

File No. 1"=20' Scale:

Date: 03/20/2024 A.A.A. Dwn.

Sheet

2 of 2