




1"=20'

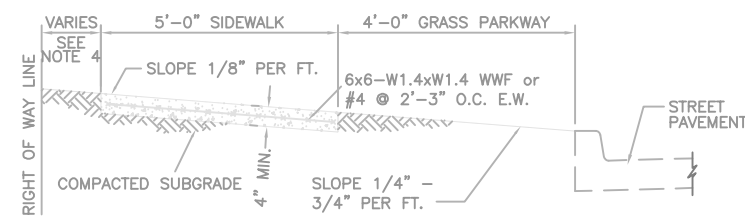

- NOTE:
1. SIDEWALK SHALL BE 4" THICK CLASS A CONCRETE.
 2. INSTALL 1/2" EXPANSION JOINTS AT INTERSECTIONS, RAMPS, STRUCTURES, DRIVEWAY APPROACHES, OR EVERY 150'.
 3. INSTALL TRANSVERSE SAW JOINTS AT SPACING EQUAL TO SIDEWALK WIDTH.
 4. STANDARD SIDEWALK PLACEMENT IS 12" FROM RIGHT OF WAY LINE.
 5. NO STEEL TO BE PLACED THROUGH EXPANSION JOINT.
 6. SIDEWALK CROSS SLOPE SHALL NOT EXCEED 2.00%.

SIDEWALK WITH GRASS PARKWAY

No.	Date	By	Revision

**LESLIE LANE SIDEWALK
(GARTH TO NEWTON)**

City of Columbia, Missouri
Department of Public Works

David Allen Nichols
Registered Professional Engineer
E-24212

File No.	.
Scale:	1" = 20'
Date:	9/18/2018
Des.	A.N.H.
Dwn.	A.N.H.
Chk.	X.X.X.