


# COVERED SIDEWALK PROJECT



# COVERED SIDEWALK PROJECT

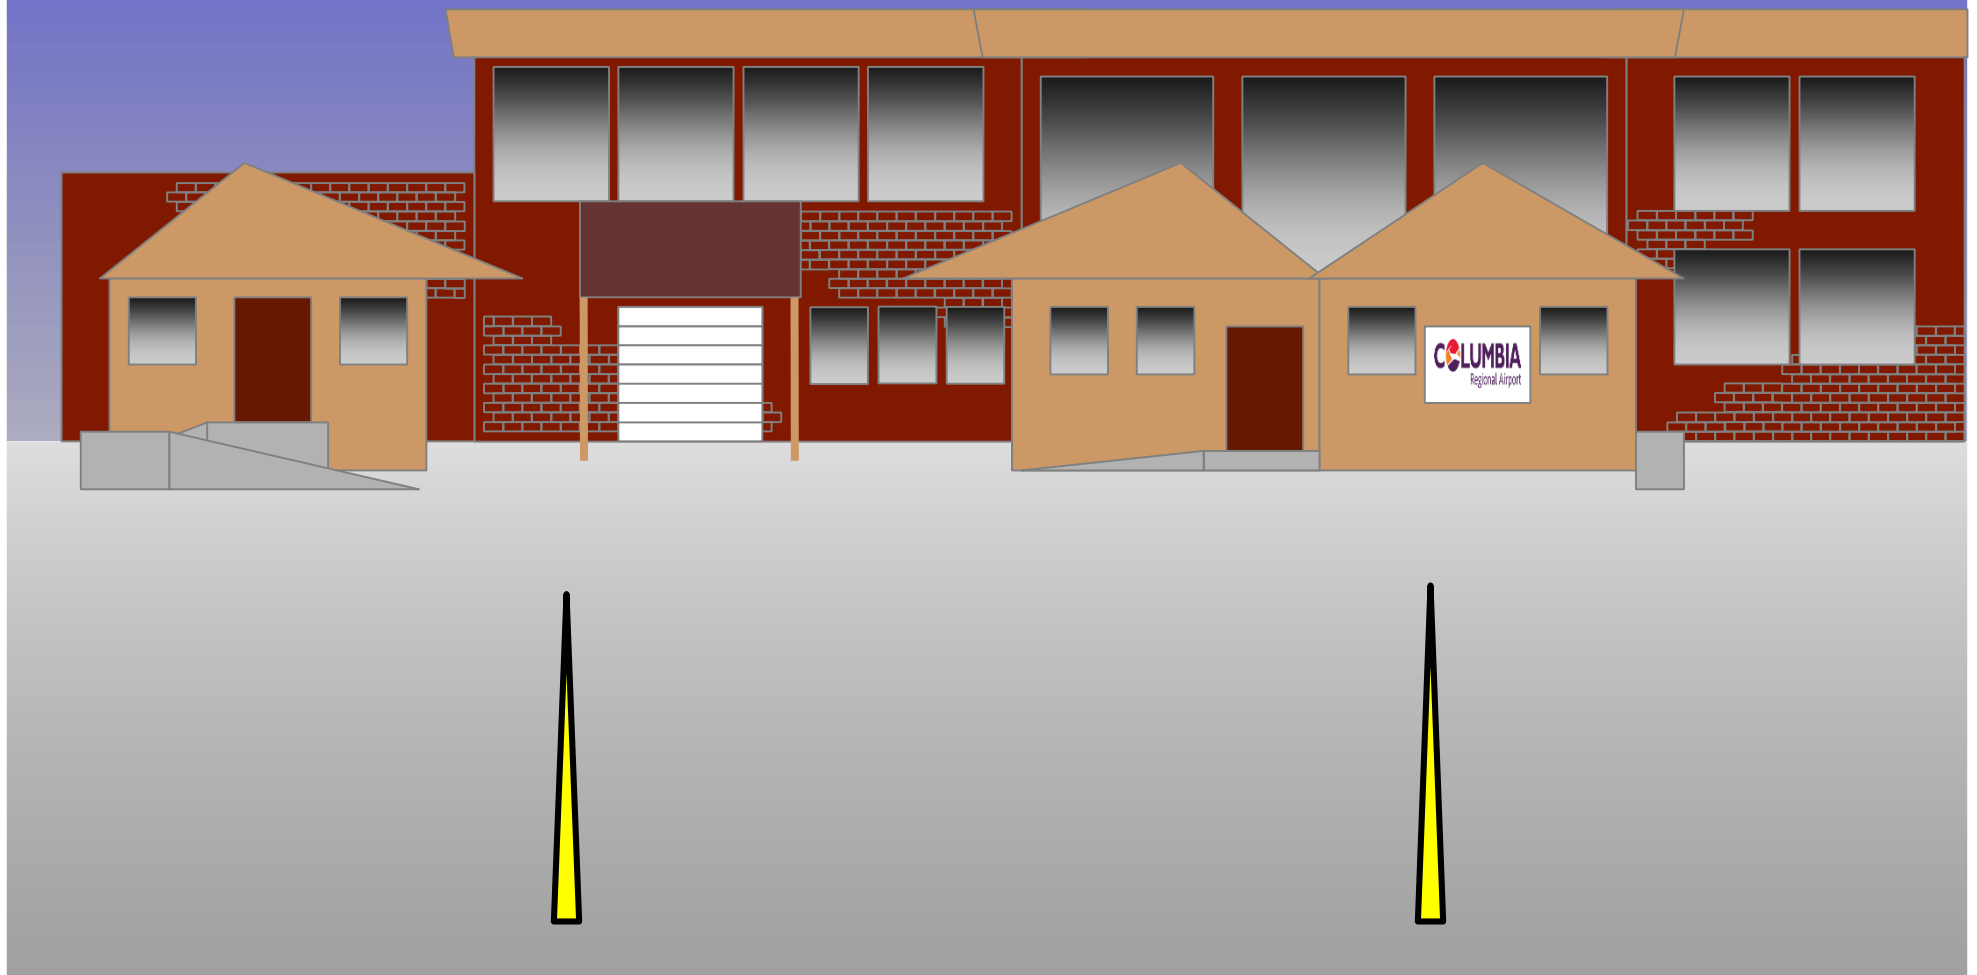

 BLUE AREAS SHOW APPROXIMATE LOCATION OF THE COVERED SIDEWALK.

# COVERED SIDEWALK PROJECT



## MEASUREMENTS:

**LENGTH: 385 FT**

**WIDTH: 10 FT**

**\*\*HEIGHT: 8 FT**


**STUBS: 10-15 FT**

STUB LENGTH WILL BE DETERMINED BY SAFE DISTANCE  
AWAY FROM AIRCRAFT SAFETY ENVELOPE.

## **\*\*HEIGHT;**

AN AREA 20 FT IN LENGTH WILL  
NEED TO BE ADJUSTED TO A HEIGHT  
OF 10 FT TO ALLOW VEHICLES TO  
TRAVEL UNDERNEATH.

THIS AREA WILL BE LOCATED ON THE  
MAIN ARTERY OF THE SIDEWALK  
BETWEEN THE GATES AND BAGGAGE  
CLAIM. (See Appendix A)

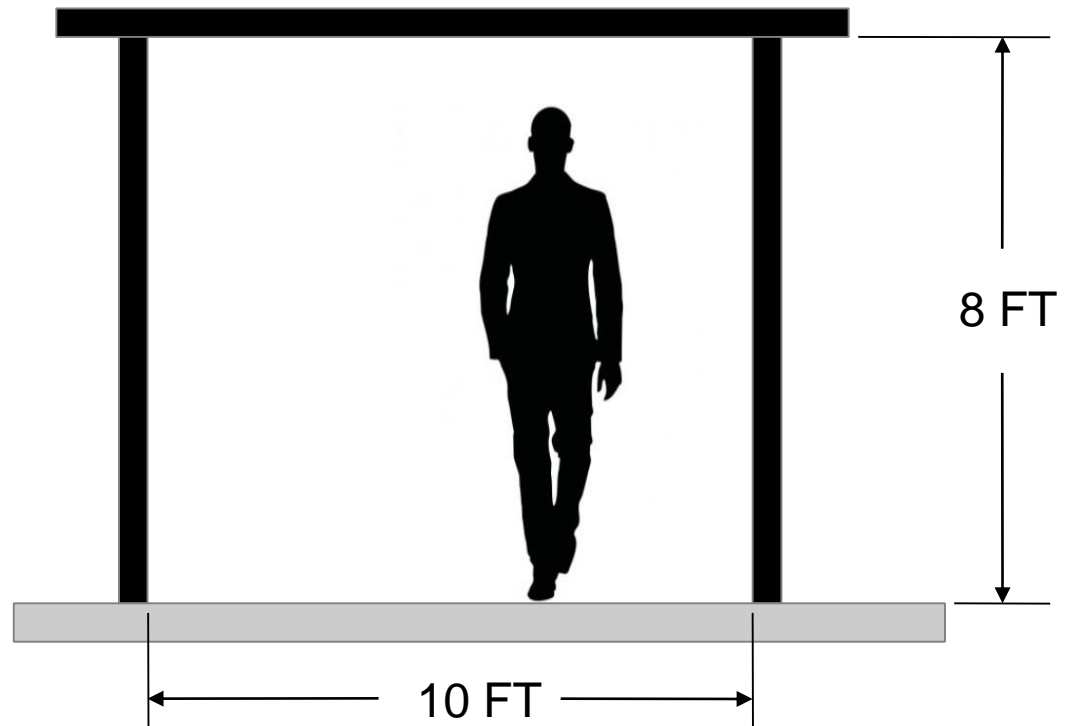

# COVERED SIDEWALK PROJECT



## OPTION #1

### FLAT ROOF DESIGN

THIS DESIGN CONFORMS TO  
THE CURRENT TERMINAL DESIGN  
OF FLAT ROOF CONSTRUCTION.



# COVERED SIDEWALK PROJECT



## OPTION #2

### **GABLE ROOF DESIGN**

THIS DESIGN PROVIDES BETTER  
SNOW LOAD FACTORS THAN THE  
FLAT ROOF.

ROOF PITCH TO BE  
DETERMINED BY MANUFACTURER.



# COVERED SIDEWALK PROJECT



## OPTION #3

### **ARCH ROOF DESIGN**

THIS DESIGN PROVIDES AN AESTHETIC APPEAL AND WITH THE USE OF WEATHER RESISTANT FABRICS, PROVIDES A SHORT TERM SOLUTION.



# COVERED SIDEWALK PROJECT



## APPENDIX A



 BLUE AREAS SHOW APPROXIMATE LOCATION OF THE COVERED SIDEWALK.