Exhibit A




TRAFFIC CONTROL DEVICES SHALL COMPLY WITH THE MUTCO.

CONTRACTOR SHALL MAINTAIN A MINIMUM LANE WIDTH OF 12' AT ALL TIMES FOR ANY OPEN LANE OF TRAFFIC.

CONTRACTOR IS RESPONSIBLE FOR NOTIFYING THE BSD RIGHT OF WAY TECHNICIAN (874-7474), IMMEDIATELY PRIOR TO CLOSURE OF STREET, DURING CONSTRUCTION FOR INSPECTIONS AND AGAIN WHEN WORK IS COMPLETE AND STREET IS RECFENED.

TRAFFIC CONTROL DEVICE LEGEND	
RDAD WORK AHEAD	PLACE STANDARD HIGHWAY SION (MUTCO SION # W20-1 SHOULD READ "ROMO WORK AHEAD"). SION SHULL BE 24" X 24" MIN.
(\$)	PLACE STANDARD HIGHBAY SIGN (MUTCD SIGN # WT-4L). SIGN SHALL BE 24" X 24" MIN.
SIDEWALK CLOSED AHEAD OROSS HERE	PLACE STANDARD HIGHWAY SIGN (MUTCO SIGN # R9-11L/R SHOULD READ "SOPRMALK CLOSED AHEAD CROSS HERE"). SIGN SHALL BE 24" X 18" MIN.
SIDEWALK CLOSED	PLACE STANDARD HIGHMAY SIGN (MUTCD SIGN # R9-9 SHOULD READ "SIDEWALK CLOSED"). SIGN SHALL BE 24* X 18* MIN.
RETROPLECIME SIND	CHANNELIZER CONE/MARKER. 36" TALL MIN.

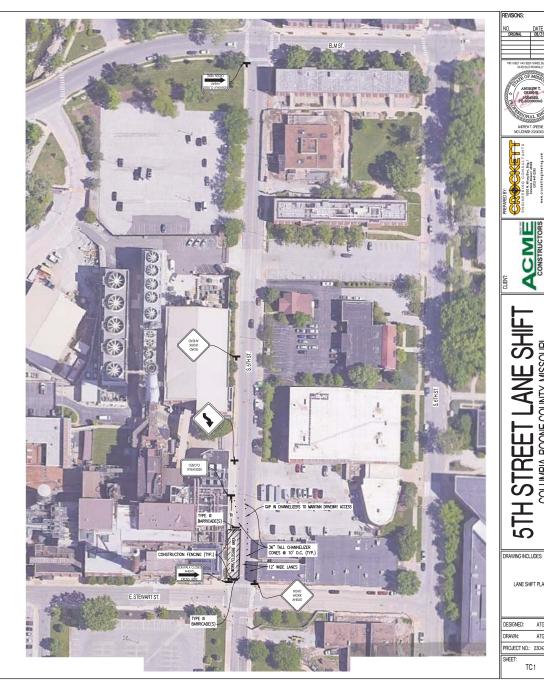

TC1